


## Wall-mount Bracket Installation Guide

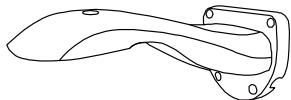

This wall-mount bracket is designed for both outdoor and indoor use.

### Package Content

Make sure you have the items below in your box:




Wall-mount Bracket x 1



Mounting base x 1

### The accessories:



x3



x3



x2



x4



x4



x1



x3

### Compatible Camera Type

This bracket is suitable for the vandal-proof type camera as shown below:



### Note before installation

1. This wall-mount bracket is designed for both outdoor and indoor use.
2. Arrange the cables of camera before the wall-mount bracket is attached and secured to a wall.

### Installation

**Step1:** Remove the dome cover of the camera, as shown in **Figure 1**.

Then, find the three mounting holes on the camera base.




Figure 1

### Installation (Continued)

**Step2:** Attach the camera base to the bracket mounting base, and place the camera cables through the mounting base. Then, pull the cables tightly, and align the three mounting holes on the camera with the mounting base, as shown in **Figure 2**.

**Step3:** Fasten the camera and the mounting base, as shown in **Figure 2**.

**Note:** Use the screws supplied with the bracket, instead of the ones supplied with the camera, to fasten the camera and the mounting base.

**Step4:** Locate where you want to install this wall-mount bracket, and drill holes on the wall for securing the bracket and routing the cables (if necessary).

**Step5:** Remove the upper cover of the bracket, and attach the bracket to the wall and secure it, as shown in **Figure 3**.

**Note:** Before the bracket is secured, make sure the cables of the camera is routed and arranged properly in the bracket.

**Step6:** Attach and slightly fasten the camera to the bracket as indicated in **Figure 4**. The camera will be hooked.

**Step7:** Fasten the camera and the bracket, as shown in **Figure 5**.

**Step8:** Power on the camera, and make necessary adjustment to its viewing angle and focus.

**Step9:** Replace the dome cover back to the camera, replace the upper cover of the bracket back, and fasten it with a Phillips screw or a hex socket screw, and put the cap on it to finish the installation, as shown in **Figure 6**.

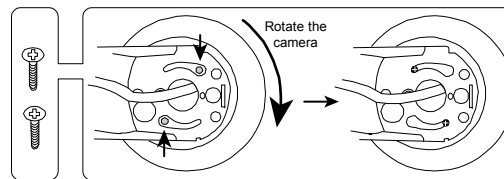


Figure 4

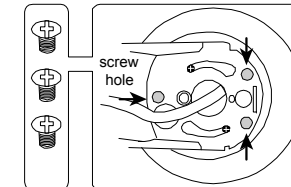


Figure 5

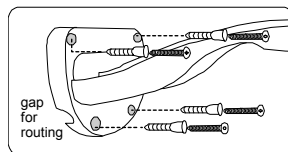
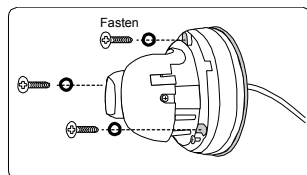
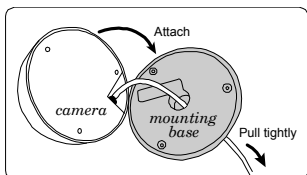


Figure 2

Figure 3

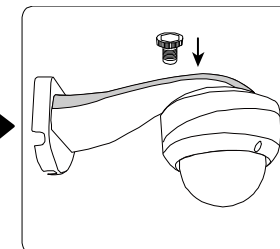
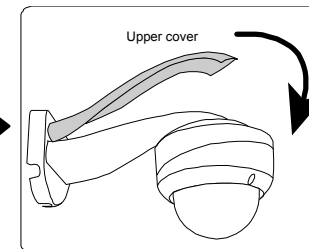
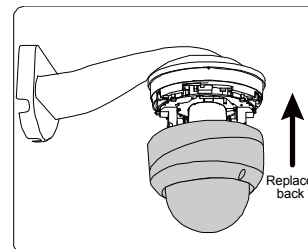


Figure 6