


1. Log into the Video Web Server program
2. Click on the **system config** tab. (circled in red)




3. The system settings window will pop up. Expand the DVR tab by clicking on the + symbol next to it
4. Click on Search List from the expanded list
5. Follow the 3 steps listed on the graph below to download the HDD list

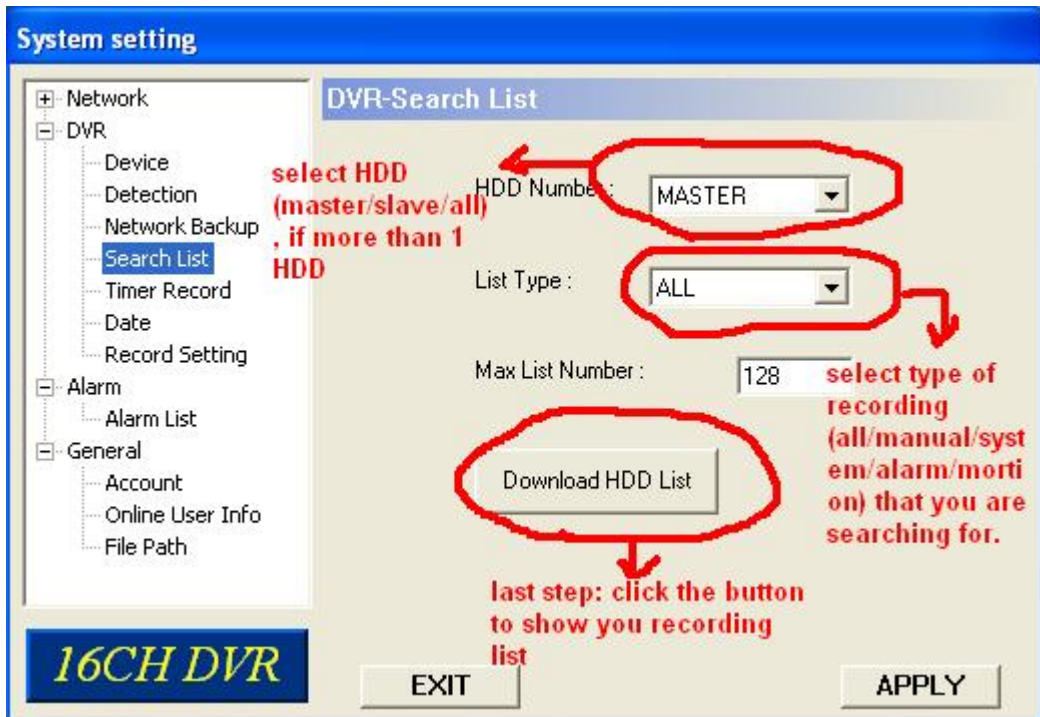


6. A list of recorded events will be displayed. (You have the option to view list of all


recordings, or you can view only recording lists for manual, system, alarm or motion.

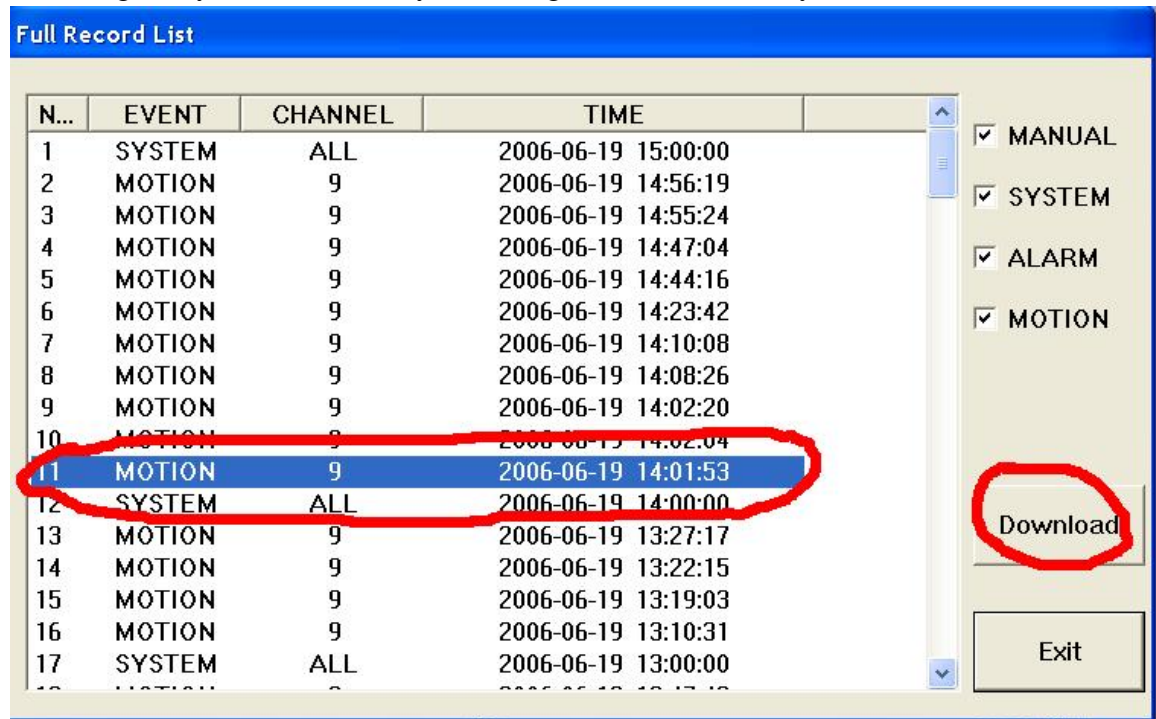

7. Scroll down the list until you find the event you want and select it. The list will be highlighted in blue. Then click on the Download button.
8. The recorded list window will automatically close and the DVR-Network Backup window will be displayed. All the entries will be already filled.
9. For recording onto Hard Drive, follow the 3 steps shown on figure below.

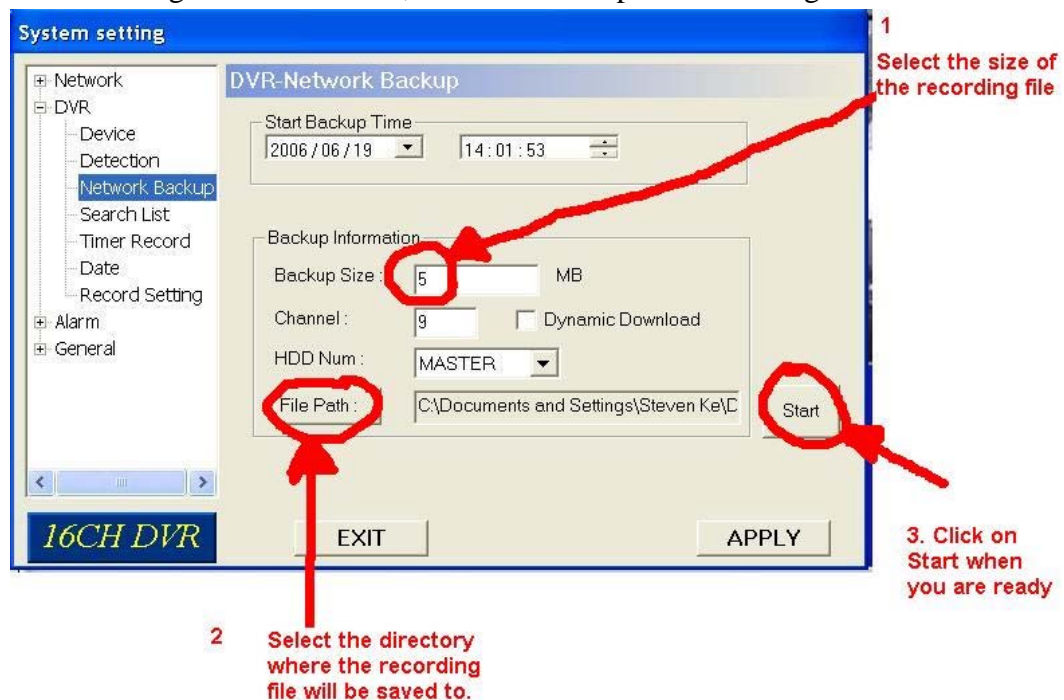

10. After clicking on start, a progress bar will be displayed to show that the recording is been saved onto your hard drive. When the progress bar reaches 100%, the screen below will be show. Click on play if you want to view the clip.

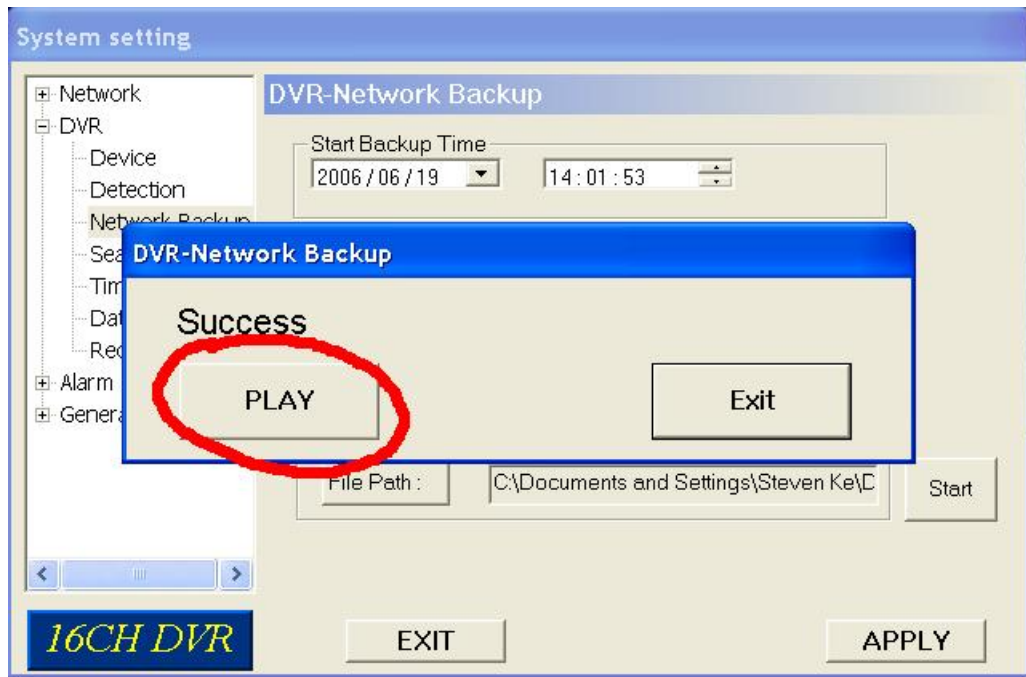

1. If you would like to playback the recording directly from the DVR, please follow the steps below.
2. After you have logged onto the DVR through the Web Server software, click on the search button (circled in red) to enter the search menu.



3. You can navigate through the menu using the **enter button** and the **up/down/left/right buttons** identified below.



4. Select the recording list you wish to see and press the **enter button**. Next scroll up or down using the up/down button to highlight the recording you wish to see and press the **enter button**. The recording will then be played back.